


Now In Production

JUNE 2007

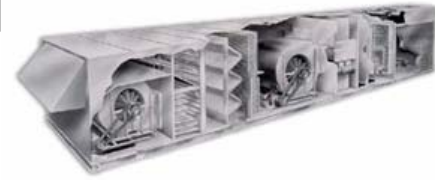

EMERSON HOSPITAL, CONCORD, MA

Two (2) Custom new indoor air handlers, 48,730 CFM airflow, 148 tons of chilled water cooling and hot water coil heating sections. 100% redundancy.

Representative : Noble & Associates. 317 Libbey Industrial Pkwy, suit 100, Weymouth, MA 02189
Kevin Morrison ; P 781-337-1630; F 781-337-9289 ; www.noblebas@aol.com




Each unit consist of two supply and two return air blowers with back draft damper, 100 HP premium efficiency supply and 25 HP return air motors for 100% redundancy.



End return, top discharge with supply and return smoke dampers, outside air monitoring station and outside air and return air aluminum airfoil dampers.

Now In Production

JUNE 2007

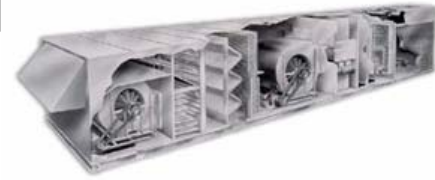

EMERSON HOSPITAL, CONCORD, MA

Two (2) Custom new indoor air handlers, 48,730 CFM airflow, 148 tons of chilled water cooling and hot water coil heating sections. 100% redundancy.

Representative : Noble & Associates. 317 Libbey Industrial Pkwy, suit 100, Weymouth, MA 02189
Kevin Morrison ; P 781-337-1630; F 781-337-9289 ; www.noblebas@aol.com



There are 4 chilled water coils and 4 hot water coils with stainless steel casing in each unit, the headers are stubbed out of both sides of the units for ease of coils removal from each side.



The cabinets are designed for total static pressure of 8.04 (IN-WC), additional liners added to prevent air leaks, then covered with 2" insulated panels with Embossed mill finish aluminum (never rusts) exterior panel.

